Specialty Materials THE BEST GARMENT DECORATION PRODUCTS

DecoFILM® Soft Metallics

- Offers a smooth and soft metallic finish
- Stretchy and very durable
- Many different finishes and patterns available
- Pressure-sensitive carrier enables easy weeding and repositioning



403.262.6915 888.235.2838 qualitydigitalsolutions.ca

Acceptable Fabrics

Cotton, Uncoated Polyester, Fabric Blends, Polyester/Acrylic, and Similar Fabrics *Not suitable for treated or dyed garments
Not Suitable for Nylon Fabrics

Sizing Available

Available Widths (in.): 19.5" only

Available Lengths (ft.): 15', 30', 45', 60', 90', and 162' rolls

Thickness

3 mils/75 microns

Special Precautions

AFTER WASHING, ALWAYS IRON INSIDE OUT - DO NOT IRON DIRECTLY ON THE FILM. WE DO NOT RECOMMEND LAYERING THIS MATERIAL. Please note: Re-pressing keeps material looking consistent throughout wash cycles, but it will give it more of a brushed metal appearance.

Splices in rolls may cause material to conform around edges of splice tape, but this will not affect plotter cutting or the finished look.

Please note: The white is translucent. The following colors are translucent in some areas and any color garment will show through: Green/Black Camo, Earthtone Camo, Grey Camo, and Blue/Black Camo. The following colors are slightly translucent, but does not appear to show color through when pressed: Rainbow Oil, Leopard Silver, and Leopard Gold.

Please note: the Holoshine colors have a horizontal line going down the middle of the roll and a vertical line approx. every 29.5". This was part of the manufacturing process and is not a defect.



45° Blade Recommended



Cut this material in mirror image



302°F - 320°F





7-8 Seconds



Peel cold, cover with Teflon and re-press for 3-5 seconds



Wash inside out, cold water, gentle cycle, tumble dry low.

Find us on Social Media!











Test on dazzle cloth and other moisture-wicking polyesters. Moisture-wicking materials have better adhesion when washed and dried using no fabric softener or blotted with rubbing alcohol before pressing. Be advised that dye migration has occurred with low energy dyes in polyester and poly-blend fabrics.

Specialty Materials


THE BEST GARMENT DECORATION PRODUCTS









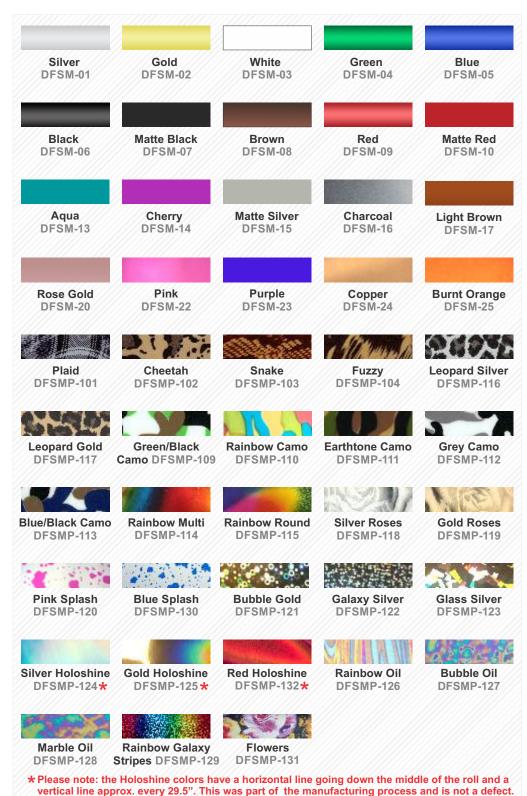

Toll Free: 877.437.8556

www.SpecialtyMaterials.com

Test on dazzle cloth and other moisture-wicking polyesters. Moisture-wicking materials have better adhesion when washed and dried using no fabric softener or blotted with rubbing alcohol before pressing. Be advised that dye migration has occurred with low energy dyes in polyester and poly-blend fabrics.